

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number  
**WO 00/77325 A1**

(51) International Patent Classification: **E04H 12/10, E04C 3/08**

(21) International Application Number: **PCT/AU00/00036**

(22) International Filing Date: **24 January 2000 (24.01.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
PQ 0881 9 June 1999 (09.06.1999) AU  
PQ 3690 27 October 1999 (27.10.1999) AU

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and  
(72) Inventor: **PRESTON, John, Clement [AU/AU]; 196 Silverwater Road, Silverwater, NSW 2128 (AU).**

Published:  
— *With international search report.*

(74) Agent: **FREEHILLS CARTER SMITH & BEADLE; MLC Center, Martin Place, Sydney, NSW 2000 (AU).**

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **MULTI-PURPOSE STRUCTURAL COMPONENT**

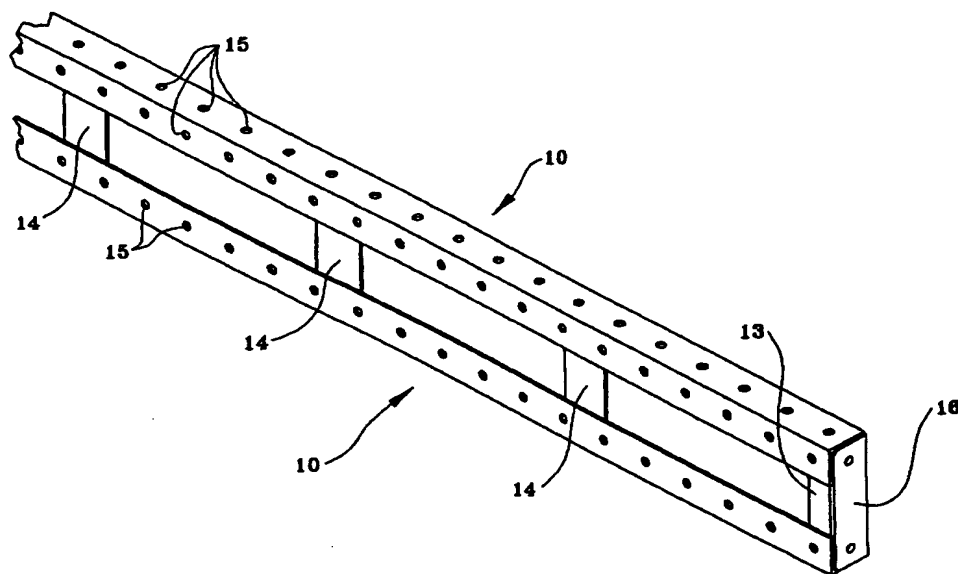

(57) Abstract: A fabricated structural component for skeletal framework of structures, having five substantially planar faces corresponding to five faces of an elongated rectangular prism, namely a front face, two side faces and two end faces, the component comprising two elongate rolled steel angle elements (10), and a plurality of discrete spacers (13, 14) extending between the angle elements, and end elements (16). Each flange of the angle element (10) is pierced by a plurality of equi-distanced fastener clearance holes (15), and the end elements (16) are pierced by two fastener clearance holes.

WO 00/77325 A1